



THERMOSTATIC STEAM TRAP

GENERAL FEATURES

Ayvaz TKK-2N 's capsule follows the steam curves with constantly and it helps to drain condensate and non condensable gases. The resistance of the thermostatic trap, which is not affected by the water hammer, is also highly resistant to corrosion.

TKK-2N's filter is under cover.

For cleaning, opening the cover on the body is sufficient. Like all the Ayvaz thermostatic condensate, the TKK-2N product contains one of 3 different capsules depending on the application conditions."S" type capsules are used in standard productions. The entire trap can be supplied as a spare part. At the same time, the ball inside the seat acts as a check valve at the high back pressure in the system, preventing the condensate from mixing into the steam line.

Ayvaz TKK-2Y Thermostatic Traps can be connected to the pipeline in every position for efficient and long-term operation. Proper isolation valves must be installed to ensure the maintenance and replacement of the trap is safe.

Product Material:

Body and Cover: Forged Steel Inner Parts: AISI 304 Stainless Steel

Connection:

Threaded, Welding End, Socket and Flanged

Nominal Diameter:

DN15 (1/2") - DN25 (1")

Pressure Value:

Max. 32 bar

Working Temperature:

Max. Working Temperature 250 °C


Applications:

- -Tracing Line
- -Drying Units
- -Pressing Units
- -Steam Jacket Pipes
- -Irons

Installation:

The thermostatic trap, which can work in every position, can be connected to the pipeline at every position.

Discharge Amount



Red Chart


Steam saturation temperature max. 10 $^{\circ}$ C below the condensate drain;

Blue Chart

Cold condansate drain at 20 ° C

TECHNICIAL SPECIFICATIONS							
Connect. Type	Flanged	Threaded	Weld. End				
Dia.(mm)	15-20-25	1/2-3/4-1"	1/2-3/4-1"				
Weight(kg)	3,3-3,8-4,3	1,6-1,5-1,4	1,7-1,7-1,7				

TKK-2N THERMOSTATIC STEAM TRAP

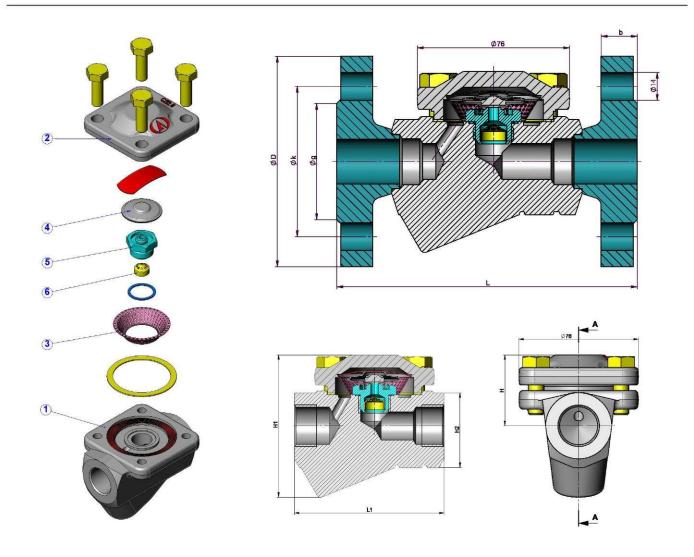

	DIMENSIONS (mm)								
Dia.	L - L1	H - H1 - H2	D	b	k	g	Holes		
15	150 - 95	45 - 67 - 40	95	16	65	45	4		
20	150 - 95	45 - 67 - 40	105	18	75	58	4		
25	160 - 95	45 - 67 - 40	115	18	85	68	4		

SPARE PARTS				
No	Part	Material		
1	Body	Forged Steel		
2	Cover	Forged Steel		
3	Filter	Stainless Steel		
4	Thermostatic Capsule	Hastelloy & Stainless Steel		
5	Seat	Stainless Steel		
6	Cover Bolts	DIN 40 CrMoV4 7		
7	Check Valve	AISI 304		

TKK-2N THERMOSTATIC STEAM TRAP				





HEAD OFFICE - FACTORY

Atatürk Sanayi Bölgesi Hadımköy Mahallesi Mustafa İnan Caddesi No: 44 Arnavutköy - İSTANBUL Tel: +90 212 771 01 45 (pbx) | Fax: +90 212 771 47 27 info@ayvaz.com | www.ayvaz.com