



# NK-16

## BOILER WATER SAMPLER

### GENERAL FEATURES

It is necessary to take samples from the boiler water from time to time to check whether the boiler water conductivity value is measured correctly. If the boiler water is taken to an open case, some of the sample water taken will become a flash steam, so it will not be a healthy sample and a correct value measurement situation will not be exist. To avoid this situation, a closed and cooled device, the NK-16 sampling container, must be used.

#### Product Features:

Body: 3" AISI 304 Stainless Steel  
Body Nominal Pressure: PN 16  
Serpentine Dimensions: 1/2" Threaded  
Serpentine: AISI 316L Stainless Steel  
Serpentine Nominal Pressure: PN 40


Sample Inlet Valve  
Dimension: 1/4" BSP  
Material: Stainless Steel

Sealing Part  
Max. Pressure: 100 bar  
Max. Temperature: 350°C

Cooling Water Inlet Valve  
Dimension: 1/2" BSP  
Boiler Water: 400 Bar 350°C  
Cooling Water: 10 bar 100°C

Application Areas  
-Steam Boiler  
-Steam Generator

# NK-16 BOILER WATER SAMPLING GASKETINER

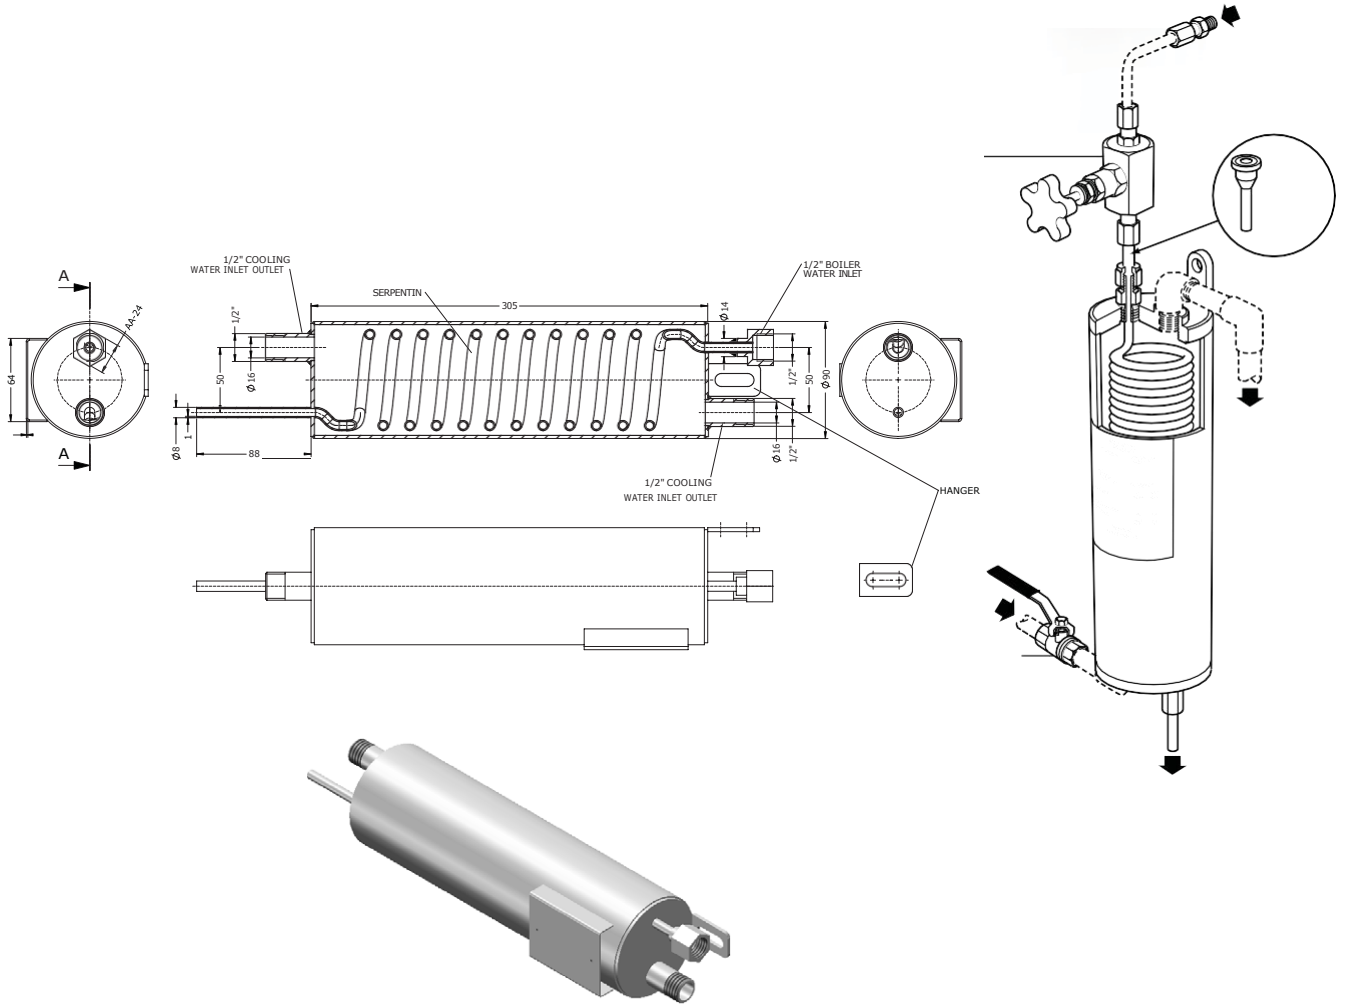

## HEAD OFFICE - FACTORY

Atatürk Sanayi Bölgesi Hadımköy Mahallesi Mustafa İnan Caddesi No: 44 Arnavutköy - İSTANBUL  
Tel: +90 212 771 01 45 (pbx) | Fax: +90 212 771 47 27  
info@ayvaz.com | www.ayvaz.com